

#### **ITALY AND OTHER** COUNTRIES SILCA S.p.A.

Via Podgora, 20 (Z.I.) 31029 VITTORIO VENETO (TV) Tel. +39 0438 9136 Fax +39 0438 913800 E-mail: silca@silca.it www.silca.biz - www.silca.it

## GERMANY

SILCA GmbH Siemensstrasse, 33 42551 VELBERT Phone: +49 2051 2710 Fax +49 2051 271172 E-mail: info@silca.de www.silca.de

#### UNITED KINGDOM SILCA Ltd. Unit 6 Lloyds Court

Manor Royal CRAWLEY RH10 9QU Phone: +44 1293 531134 Fax +44 1293 531108 E-mail: sales@silcaltd.co.uk www.silcaltd.co.uk

#### SPAIN SILCA KEY SYSTEMS S.A. C/Santander 73A 08020 BARCELONA Phone: +34 93 4981400 Fax +34 93 2788004

E-mail: silca@silca.es

www.silca.es

#### FRANCE SILCA S.A.S. 12, Rue de Rouen Z.I. Limay-Porcheville

78440 PORCHEVILLE Phone: +33 1 30983500 Fax +33 1 30983501 E-mail: info@silca.fr www.silca.fr


#### BENELUX H. CILLEKENS & B.V.

Metaalweg, 4 6045 JB ROERMOND Phone: +31 475 325147 Fax +31 475 323640 E-mail: info@hcillekens.nl www.hcillekens.nl

#### UNITED KINGDOM ADVANCED DIAGNOSTICS Ltd. Eastboro Fields

Hemdale Business Park CV11 6GL NUNEATON Phone: +44 2476 347000 Fax + 44 2476 347100 E-mail: sales@advanced-diagnostics.com www.advanced-diagnostics.com



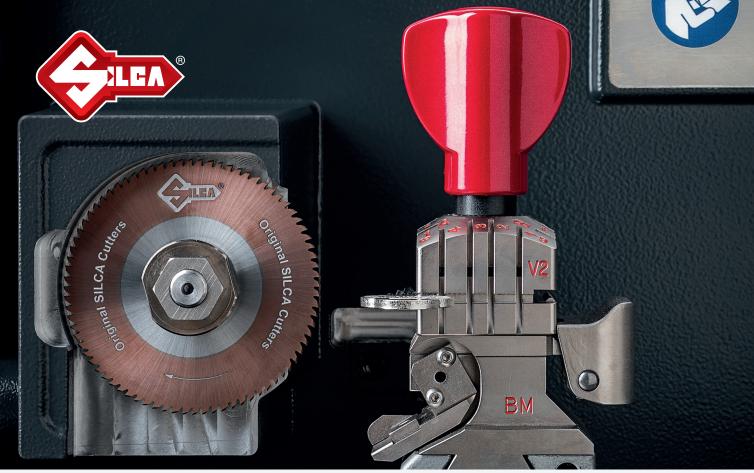

# UNOCODE F100





# THE UNIQUE ELECTRONIC KEY MACHINE FOR CUTTING BY CODE FLAT KEYS

Designed for specialist locksmiths, Silca's Unocode F100 cuts by code flat vehicle and residential keys in a significantly optimized process, improving the speed and quality of service to your customer. The machine incorporates several innovative elements: a new software specifically tailored to the needs of professional key cutters, a four-sided clamp for easily installing a wide range of keys, and an optimized layout, designed to make your job easier and more comfortable.





Unocode F100 has been designed and manufactured in conformity with CE mark European standards.



# **PROFESSIONAL DISPLAY**

- Integrated, industrial 10-inch, touch-screen display
- Tilts to give the perfect viewing angle
- Immediate response to the touch (0,01 seconds)
- Colour display with a resolution of 1280x800 pixels

# **USER-FRIENDLY SOFTWARE INTERFACE**

- Works in stand-alone





• Intuitive software interface developed for the needs of professional locksmiths, with shortcuts to the most used cutting cards and job queues

- Compatible with SKP Pro to work with existing data archives and Codemaker cards

# FULL CONNECTIVITY

- Connection both via Wi-Fi and via Ethernet to the local LAN Network
- 4 USB ports (2 ports 3.0 + 2 ports 2.0)

- HDMI port to connect an external screen
- Possibility to connect a wireless keyboard and mouse






# SAFER AND MORE COMFORTABLE **WORKING AREA**





• The safety shield closes and opens automatically when starting or ending a cycle

- The shield features two microswitches and stops automatically if obstructed to give additional protection
- 55% bigger working area compared to previous models for easier operation
- Wide accessories area on top of the machine for keeping utensils at hand while working

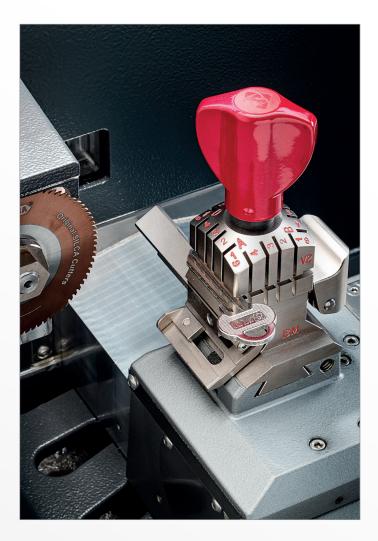

# FOUR-SIDED, VERSATILE CLAMP

- Four-sided clamp for optimized blocking of a wide variety of keys, both with head and tip stop
- Ergonomic and dynamometric knob for an easy key installation
- Nickel plating for better resistance to rust and wear
- Wide gauge with mobile stop fits keys with tip stops perfectly
- The software shows which clamp side and which stop you should use



# **QUIET AND CLEAN**

- metal (widia)






# **OPTIONAL V3 CLAMP TO INCREASE** MACHINE CAPABILITIES

- The optional V3 clamp is available to expand the machine capabilities
- The V3 clamp can be customized on two sides thanks to the specially designed upper and lower jaws to take special key profiles
- Systems cut with optional jaws include Cisa® TSP and SP, Assa® D12 and DP Cliq, Dom® RS8, Abus<sup>®</sup> XY14/Y14 and Winkhaus<sup>®</sup> RPE-RPS amongst others



- New structure optimized to absorb vibrations and noise
- Less vibrations thanks to the new 80 teeth cutter in hard
- A completely enclosed working area reduces noise during marking and cutting
- Swarf is collected in the tray below the cutting area to leave the working area clean




# UNOCODE F100 SOFTWARE

For the Unocode F Series key machines we have developed an entirely new software, engineered specifically to make your job easier and quicker. The new interface can also be customized according to your needs, so that you can keep within easy reach the functions you use most frequently.

- Cutting cards comparison available on board
- Customize your favourites: you can rename the cutting cards you use most frequently and reorder them according to your needs
- Code tables available on board
- Onboard video tutorials and product manual
- Remote service to support you when needed

#### QUICK CARD SEARCH

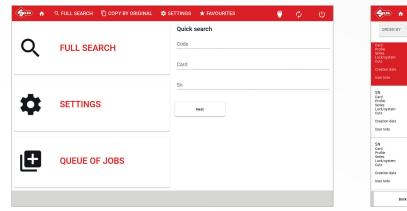


# **CUTTING CARD**

8


und 1 results Filter the results		SN 1982 Card 330 Profile Series	INFORMATIC Key blanks		ACCESSORIES nufacturer
ey blanks pries	v v	Cuts 4;	16224A	0	
ick/system	~		102248 10224C	0	
ehicles keys Clear Ap	~ oply filter		E2240	Key blank	ks
			(j)	IE224 Key man SILCA	afacturer
			U	Stem len 2370	2th
				Hook p	osition B


## **CUT PREVIEW**

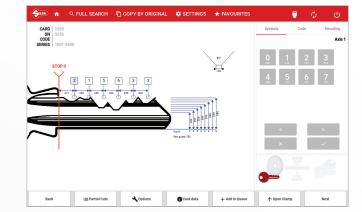

# **CUTTING CARD COMPARISON**










# **FAVOURITES**

ORDER BY

Back

Q FULL SEARCH 📋 COPY BY ORIGINAL	🌣 SETTINGS 🔺 FAVOL	urites 🥛 🗘 (				
ASCENDING	INFORMATION	APPLICATIONS ACCESSORIES				
	Key blanks	Lock Manufacturer				
345 DESCENDING TW	A55142 (i	ASSA				
123456789 Assa (TWIN/V-10) COMBI 6:	A55144 0					
o, martedì 22 dicembre 2020						
<u>×</u>						
3300	*					
325						
0123456789		Keyblanks ASS142				
3;		Key manufacturer				
martedi 22 dicembre 2020	111	SILCA				
∠		Stern length				
3849 2756	*  U	3120				
2736		Hook position				
8;8;						
martedi 22 dicembre 2020						
<u> </u>						
Remove from Favourites	Add to Compare	Compare Next				

## **UNOCODE F100 IN NUMBERS**





55% bigger working area

**10" display** industrial grade

### **PATENT PENDING SOLUTION**



Automatic opening and closing of protection shield

#### **REGISTERED COMMUNITY DESIGN**



Protecting the Unocode F Series design in all its versions

## **TECHNICAL DATA**

Electricity supply100-240V - 50/60HzCutter motor48VDCKey cutterPrismatic in coated hard metalTool speed1070 rpmMovementsOn 2 axes with ball screws act runners. Rotating axis availableV2 clampWith 4 sides, closes perfectly H if the key has symmetrical cutsRunsWith clamp: X axis: X Keys with head stop: Y axis: Keys with tip stop: Y axis:DimensionsWidth: 502 mm - Depth: 740 mWeight52 Kg		
Key cutterPrismatic in coated hard metalTool speed1070 rpmMovementsOn 2 axes with ball screws act runners. Rotating axis availableV2 clampWith 4 sides, closes perfectly H if the key has symmetrical cutsRunsWith clamp: Keys with head stop: Y axis: Keys with tip stop: Y axis:DimensionsWidth: 502 mm - Depth: 740 m	Electricity supply	100-240V - 50/60Hz
Tool speed1070 rpmMovementsOn 2 axes with ball screws act runners. Rotating axis availableV2 clampWith 4 sides, closes perfectly H if the key has symmetrical cutsRunsWith clamp: Keys with head stop: Y axis: Keys with tip stop: Y axis:DimensionsWidth: 502 mm - Depth: 740 m	Cutter motor	48VDC
MovementsOn 2 axes with ball screws act runners. Rotating axis availableV2 clampWith 4 sides, closes perfectly fi if the key has symmetrical cutsRunsWith clamp: Keys with head stop: Y axis: Keys with tip stop: Y axis:DimensionsWidth: 502 mm - Depth: 740 mm	Key cutter	Prismatic in coated hard meta
V2 clampWith 4 sides, closes perfectly F if the key has symmetrical cutsRunsWith clamp: Keys with head stop: Y axis: Keys with tip stop: Y axis:DimensionsWidth: 502 mm - Depth: 740 m	Tool speed	1070 rpm
If the key has symmetrical cutsRunsWith clamp: Keys with head stop: Y axis: Keys with tip stop: Y axis:DimensionsWidth: 502 mm - Depth: 740 mm	Movements	
Keys with head stop:Y axis:Keys with tip stop:Y axis:DimensionsWidth: 502 mm - Depth: 740 m	V2 clamp	
	Runs	Keys with head stop: Y axis:
Weight 52 Kg	Dimensions	Width: 502 mm - Depth: 740 r
	Weight	52 Kg

In compliance with current regulations relating to industrial property, we hereby state that the trade-marks or trade names mentioned in this document are the exclusive property of authorized manufacturers of locks and users. Said trade-marks or trade names are nominated only for the purposes of information so that any lock for which our keys are made can be rapidly identified. This document is reserved exclusively for professional key cutters who use Silca products. / All information and illustrations in this document are for guidance only. Silca reserves the right to alter products designs, dimensions or info to improve the products quality. The contents of this document are fully protected by Copyright and may not be copied or reproduced in any form, without written permission from Silca S.p.A. Any controversy shall be settled by the Courts of Justice where the company has its headquarters, with express exclusion of any other court.

10



al (widia)

ctivated by step motors on ground roller ole with optional clamp

keys fitted on their backs or on the profile ts

: 30 mm, Y axis: 72 mm : max. 45 mm (by code) : max. 45 mm (by code)

mm - Height: 680 mm